

0-10V Driver w/ETL Listed Junction Box

Safety & Tips


- Before commencing any installation or maintenance work, disconnect the driver from AC power entirely.
- Keep proper ventilation around the driver and do not stack any objects on it. Maintain 4-6 inches clearance when the driver is adjacent to a heat source.
- Installing this driver in a high ambient temperature environment may increase the internal component temperature and will require a derating in output current.
- The current rating of an approved primary /secondary cable should be greater than or equal to that of the unit. Please refer to the driver's specification sheet.
- When using this driver to power LED lighting with wet location connectors, verify that the connection between the driver and the lighting fixture is watertight.
- Ensure that the dimmer used with this 0-10V Driver is compatible. This driver requires a minimum load of 0.15mA.
- DO NOT connect the wire marked "DIM+" to that marked "V-".
- Suitable for indoor use or outdoor use without direct sunlight exposure. This driver is non-submersible.

Quick Specs

Input: 100~130V AC
 Max. load: 100%
 Min. load: none



Dry Location

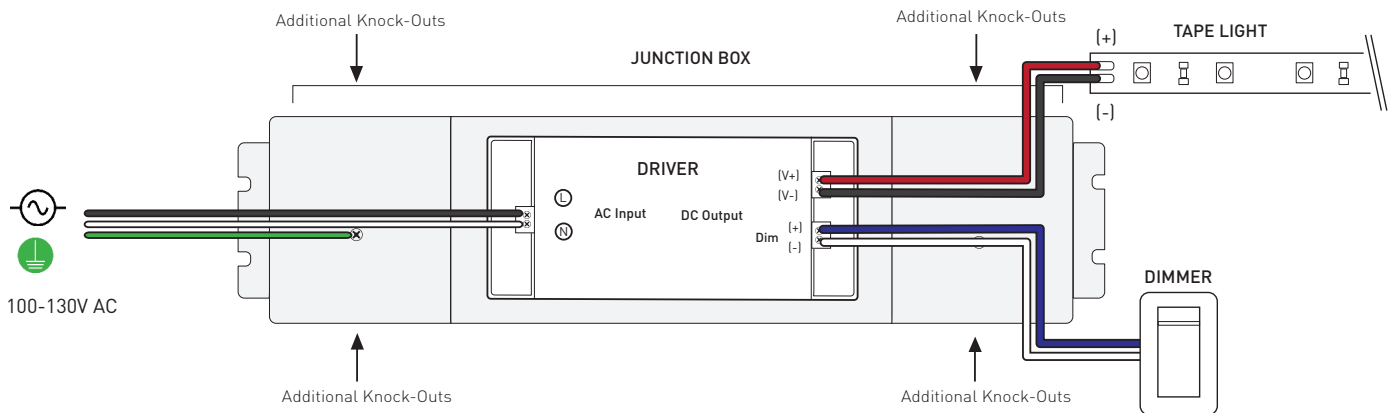

Wet Location

