


## LED Tape Light Cover

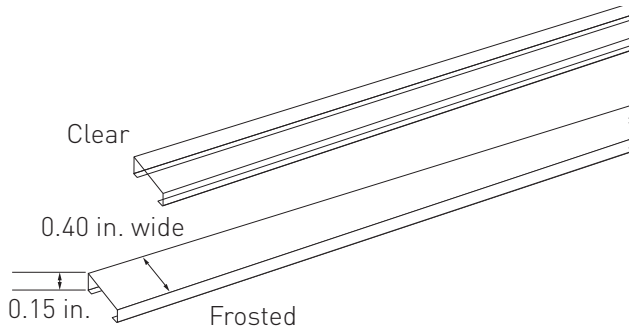

The LED Tape Light Cover provides protection and diffusion (frosted model) for LED lighting. This cover is quick and easy to install, and is compatible with Alloy LED's PrimaLine® 1.5 and PrimaLine 3 dry location tape lights.

### Application:

1. Be sure that the tape light and mounting surface are clean and dry before application.
2. Peel the brown backing off the underside of the tape light. Adhere to the mounting surface with firm pressure.
3. Peel the backing off the underside of the two sides of the tape light cover. Adhere to the mounting surface with firm pressure.

## PRODUCT INFORMATION

Item #	Type	Length
AL-01-01-9931-FRT	Frosted	39 in.
AL-01-01-9932-CLR	Clear	39 in.

## TECHNICAL INFORMATION

<b>Material</b>	Polycarbonate
<b>Max. Voltage Tape Light</b>	24V DC
<b>Max. Wattage Tape Light / ft.</b>	3W
<b>Compatible Tape Lights</b>	PrimaLine 1.5, 3
<b>Height</b>	0.15 in.
<b>Width</b>	0.4 in.