

# ALLOY LED® Specifications

## Non-Dimmable Drivers










AL-98-04-12060, AL-98-04-24060




Alloy LED offers Non-Dimmable Drivers that supply reliable, efficient low voltage power to RGB and RGB-W color controllers (which have on-board dimming functionality) and for use with white tape light on an on/off switch. Although non-dimmable drivers are compatible with AC on/off switches, they are not dimmable with AC dimmer switches.

- Already derated (can be loaded to maximum wattage capacity)
- IP67 for use outdoors or indoors in wet environments
- 5 year warranty

### QUICK SPECIFICATIONS

<b>Input</b>		120V AC
<b>Features</b>	 	100% maximum load 0% minimum load
<b>Environment</b>	  	Dry/wet environment (IP67) Dust tight and protected against immersion in 1m of water for up to 30 mins
<b>Certifications</b>	 	RoHS UL Recognized Component
<b>Warranty</b>		5 year limited

### DIMENSIONS

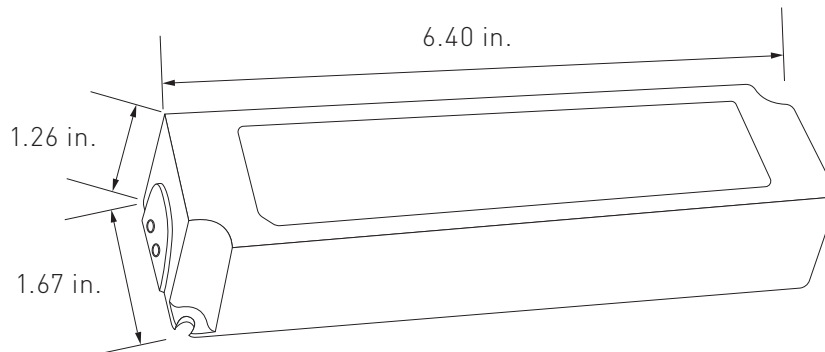


## TECHNICAL INFORMATION

Item #		AL-98-04-12036	AL-98-04-24036
<b>Output</b>	DC Voltage <sup>1</sup>	12V DC	24V DC
	Rated Current	5A	2.5A
	Current Adj. Range	0~5A	0~2.5A
	Rated Power	60W	60W
	Ripple & Noise (Max.) <sup>2</sup>	120mVp-p	150mVp-p
	Voltage Tolerance <sup>3</sup>	±5.0%	
	Line Regulation	±1.0%	
	Load Regulation	±2.0%	
	Setup, Rise Time <sup>6</sup>	500ms, 20ms/230V AC	500ms, 20ms/115V AC at full load
	Hold Up Time (Avg.)	50ms/230V AC	16ms/115V AC at full load
<b>Input</b>	Voltage Range <sup>4</sup>	120V AC	
	Frequency Range	47~63HZ	
	Efficiency (Avg.)	>83% (12V DC)	>86% (24V DC)
	AC Current (Avg.)	1.2A/115V AC 1A/230V AC	
	Inrush Current (Max.)	COLD START 60A (twidth=510µs measured at 50% Ipeak) at 230V AC	
	Leakage Current	0.25mA /240V AC	
<b>Protection</b>	Overload	110~150% rated output power Protection type: Hiccup mode, recovers automatically after fault condition is removed	
	Over Voltage	13.8~16.2V	27.6~32.4V
		Protection type: Shut down o/p voltage, re-power on to recover	
<b>Environment</b>	Working Temp.	-30~+70°C, -22°F~+158°F (Refer to "Derating Curve")	
	Working Humidity	20~90% RH, non-condensing	
	Storage Temp., Humidity	-40~+80°C, -40~176°F / 10~95%RH	
	Temp Coefficient	±0.03%/°C (0~50°C, 32~122°F)	
	Vibration	10~500Hz~2G 10min./1 cycle, period for 60min. each along X, Y, Z axes	
<b>Safety &amp; EMC</b>	Safety Standards	UL879, UL1310, CSA C22.2 No. 207-M89, CAN/CSA C22.2 No. 223-M91, IP67, IEC60950-1:2005+A2:2013 approved; design refer to TUV EN60950-1	
	Withstand Voltage	I/P-O/P: 3KV AC	
	Isolation Resistance	I/P-O/P: 100MΩ/500V DC/25°C, 77°F/70%RH	
	EMC Emission	Compliance to EN55022 (CISPR22) ClassB, EN61000-3-2 Class A, EN61000-3-3	
	EMC Immunity	Compliance to EN61000-4-2, 3, 4, 5, 6, 8, 11, EN55024, light industry level, criteria A	
<b>Other</b>	Warranty	5 Year Limited	
	MTBF	732Khrs min. MIL-HDBK-217F (25°C, 77°F)	
	Size	6.4 x 1.67 x 1.26 in.	


- All parameters NOT specially mentioned are measured at 230V AC input, rated load and 25°C, 77°F of ambient temperature.
- Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.
- Tolerance: includes set up tolerance, line regulation and load regulation.
- Derating may be needed under low input voltage. Please check the static characteristics for more details.
- The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.
- Length of set up time is measured at first cold start. Turning ON/OFF the power supply may lead to increase of the setup time.
- The unit might not be suitable for lighting applications in EU countries. Please check with your local authorities for the possible use of the unit.
- Suitable for indoor use or outdoor use without direct sunlight exposure. Please avoid immerse in the water over 30 minutes.

**Warning: Do NOT reverse polarity high voltage input of the driver as it will destroy the product.**

## WIRING DIAGRAMS

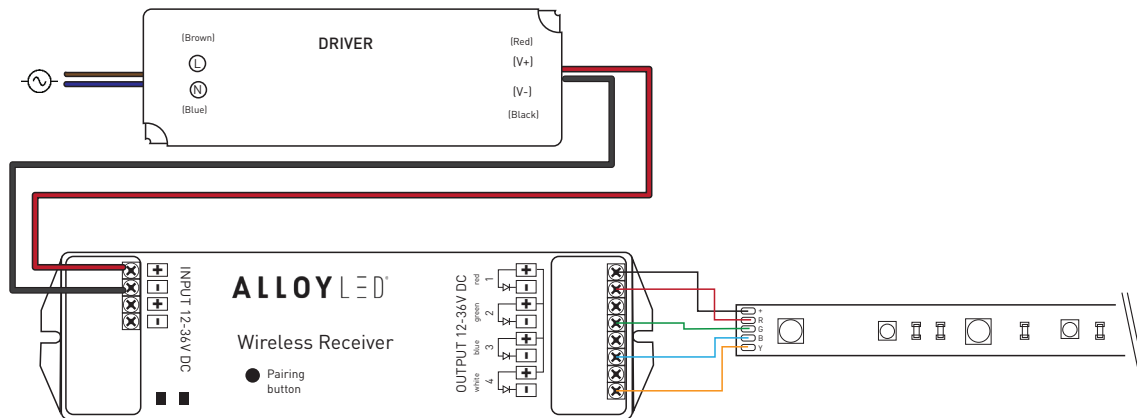

## IP (INGRESS PROTECTION) RATING GUIDE

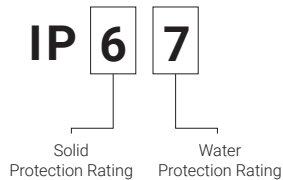

Solid Ingress Rating	Water Ingress Rating
<b>0</b> Not protected against solid objects	<b>0</b> Not protected against water
<b>1</b> Protected against solid objects greater than 50mm	<b>1</b> Protected against vertically falling water droplets
<b>2</b> Protected against solid objects greater than 12.5mm	<b>2</b> Protected against vertically falling water droplets with enclosure tilted up to 15°
<b>3</b> Protected against solid objects greater than 2.5mm	<b>3</b> Protected against sprays of water up to 60°
<b>4</b> Protected against solid objects greater than 1mm	<b>4</b> Protected against water splashes from all directions
<b>5</b> Protected against limited amounts dust	<b>5</b> Protected against jets of water
<b>6</b> Dust tight	<b>6</b> Protected against heavy seas and jets of water
	<b>7</b> Protected against immersion in 1m of water for up to 30 min.

## TROUBLESHOOTING

---

Q: Why are the lights connected to the driver blinking roughly once a second?

A: The driver may be overloaded. Check to make sure the maximum wattage is not being exceeded. There could also be a possibility of incompatible voltage. Confirm that the driver and tape light voltage match.

Q: How do I determine the compatibility?

A: Check the voltage, wattage, load capacity of both the tape light and driver.

Q: Is it possible to have multiple runs of tape light that are daisy-chained together connect to a driver with 1 lead wire?

A: Yes, but only if the total length of consecutive runs do not exceed the tape light's maximum run and also does not exceed the driver's maximum wattage.