

# Non-Dimmable Drivers

AL-98-04-12006




Alloy LED offers Non-Dimmable Drivers that supply reliable, efficient low voltage power to RGB and RGB-W color controllers (which have on-board dimming functionality) and for use with white tape light on an on/off switch. Although non-dimmable drivers are compatible with AC on/off switches, they are not dimmable with AC dimmer switches.

- Already derated (can be loaded to maximum wattage capacity)
- IP40 for use indoors in dry environments
- 5 year warranty

## QUICK SPECIFICATIONS

Input		120V AC
Features	 	100% maximum load 0% minimum load
Environment	 	Dry environment (IP40) Protected against solid objects greater than 1mm
Certifications	 	RoHS UL Recognized Component
Warranty		5 year limited

## DIMENSIONS

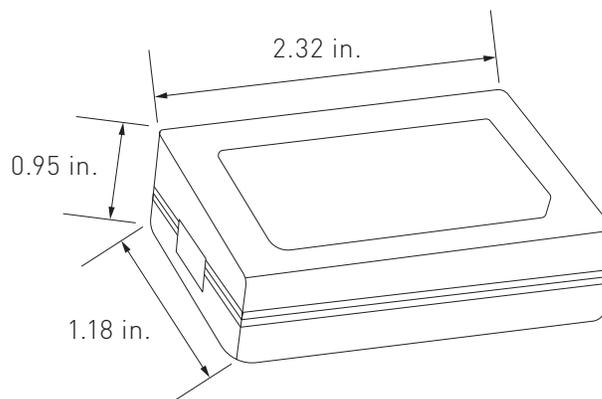


## TECHNICAL INFORMATION

Item #	AL-98-04-12006	
<b>Output</b>	DC Voltage <sup>1</sup>	12V DC
	Rated Current	0.67A
	Current Adj. Range	0~0.67A
	Rated Power	8W
	Ripple & Noise (Max.) <sup>2</sup>	150mVp-p
	Voltage Tolerance <sup>3</sup>	±5.0%
	Line Regulation	±1.0%
	Load Regulation	±2.0%
	Setup, Rise Time <sup>6</sup>	500ms, 20ms/115V AC at full load
	Hold Up Time (Avg.)	16ms/115V AC at full load
<b>Input</b>	Voltage Range <sup>4</sup>	120V AC
	Frequency Range	47~63HZ
	Efficiency (Avg.)	>80% (12V DC)
	AC Current (Avg.)	0.3A/115V AC 0.15A/230V AC
	Inrush Current (Max.)	COLD START 70A (twidth=120µs measured at 50% Ipeak) at 230V AC
	Leakage Current	0.25mA /240V AC
<b>Protection</b>	Overload	105% rated output power Protection type: Hiccup mode, recovers automatically after fault condition is removed
	Over Voltage	13.8~16.2V Protection type: Shut down o/p voltage, re-power on to recover
<b>Environment</b>	Working Temp.	-30~+65°C, -22°F~+149°F (Refer to "Derating Curve")
	Working Humidity	20~90% RH, non-condensing
	Storage Temp., Humidity	-40~+80°C, -40~176°F / 10~95%RH
	Temp Coefficient	±0.03%/°C (0~50°C, 32~122°F)
	Vibration	10~500Hz, 2G 10min./1 cycle, period for 60min. each along X, Y, Z axes
<b>Safety &amp; EMC</b>	Safety Standards	Design refer to UL8750,CSA C22.2 No.250.0-08; ENEC EN61347-1,EN61347-2-13
	Withstand Voltage	I/P-O/P: 3.75KV AC
	Isolation Resistance	I/P-O/P:>100MΩ/500V DC/25°C, 77°F/70% RH
	EMC Emission	Compliance to EN55015,EN61000-3-2 Class A,EN61000-3-3
	EMC Immunity	Compliance to EN61547,EN61000-4-2,3,4,5,6,8,11; light industry level(surge 2KV), criteria A
<b>Other</b>	Warranty	5 Year Limited
	MTBF	743.5Khrs min. MIL-HDBK-217F (25°C, 77°F)
	Size	2.32 x 1.18 x 0.95 in.


1. All parameters NOT specially mentioned are measured at 230V AC input, rated load and 25°C, 77°F of ambient temperature.
2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.
3. Tolerance: includes set up tolerance, line regulation and load regulation.
4. Derating may be needed under low input voltage. Please check the static characteristics for more details.
5. The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.
6. Length of set up time is measured at first cold start. Turning ON/OFF the power supply may lead to increase of the setup time.
7. The unit might not be suitable for lighting applications in EU countries. Please check with your local authorities for the possible use of the unit.
8. Suitable for indoor use or outdoor use without direct sunlight exposure. Please avoid immerse in the water over 30 minutes.

**Warning: Do NOT reverse polarity high voltage input of the driver as it will destroy the product.**

## WIRING DIAGRAMS

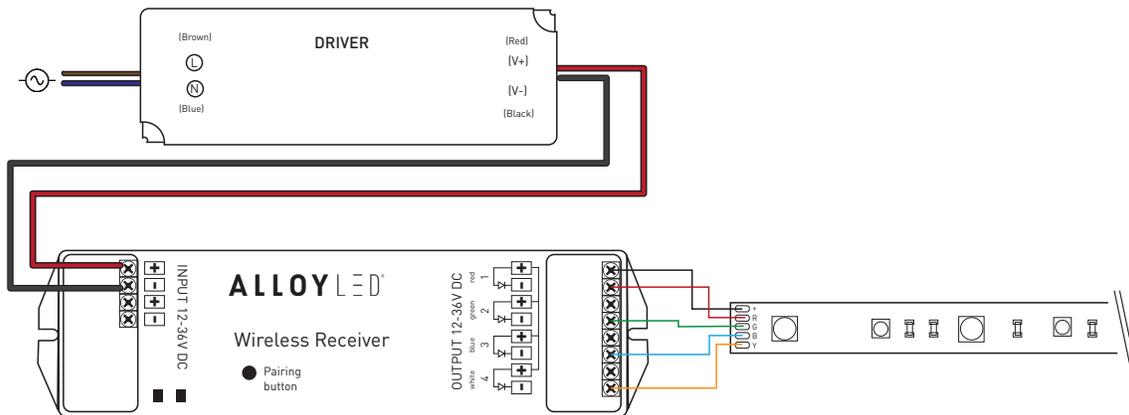

## IP (INGRESS PROTECTION) RATING GUIDE

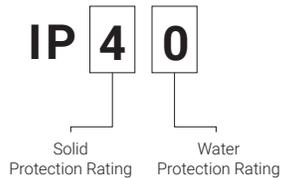

### Solid Ingress Rating

<b>0</b>	Not protected against solid objects
<b>1</b>	Protected against solid objects greater than 50mm
<b>2</b>	Protected against solid objects greater than 12.5mm
<b>3</b>	Protected against solid objects greater than 2.5mm
<b>4</b>	Protected against solid objects greater than 1mm
<b>5</b>	Protected against limited amounts dust
<b>6</b>	Dust tight

### Water Ingress Rating

<b>0</b>	Not protected against water
<b>1</b>	Protected against vertically falling water droplets
<b>2</b>	Protected against vertically falling water droplets with enclosure tilted up to 15°
<b>3</b>	Protected against sprays of water up to 60°
<b>4</b>	Protected against water splashes from all directions
<b>5</b>	Protected against jets of water
<b>6</b>	Protected against heavy seas and jets of water
<b>7</b>	Protected against immersion in 1m of water for up to 30 min.

## TROUBLESHOOTING

---

Q: Why are the lights connected to the driver blinking roughly once a second?

A: The driver may be overloaded. Check to make sure the maximum wattage is not being exceeded. There could also be a possibility of incompatible voltage. Confirm that the driver and tape light voltage match.

Q: How do I determine the compatibility?

A: Check the voltage, wattage, load capacity of both the tape light and driver.

Q: Is it possible to have multiple runs of tape light that are daisy-chained together connect to a driver with 1 lead wire?

A: Yes, but only if the total length of consecutive runs do not exceed the tape light's maximum run and also does not exceed the driver's maximum wattage.