


SURFALFLEX 1 AND TAPE LIGHT HOTSPOT AND COMPATIBILITY GUIDE

Tape Light	Wire Connector	AmpChamp	Hotspot
PrimaLine [®] 1.5	S		4
PrimaLine 1.5 XT			N/A
PrimaLine 2.5 COB	S		0
PrimaLine 2.7 LP	S		2
PrimaLine 3	S		3
PrimaLine 3 XT			N/A
PrimaLine 4.4 Gen 2	S		3
PrimaLine 4.4 XT Gen 2	S		3
PrimaLine 5.5 LP	S		2
PrimaLine 6.6 Gen 2			N/A
PrimaLine 7	S		3
PrimaLine 8 Gen 2			N/A
Varien™ 5.5 Dim-to-Warm			N/A
Radialux [®] 2.2 RGB	S		5
Radialux 4.2 COB RGB	S		0
Radialux 4.4 RGB	S		4
Radialux 4.4 RGBW			N/A
Radialux 4.7 LP RGBW	S		3-5
Radialux 5.9 RGBW			N/A
Radialux 8.8 RGB			N/A
RazorLine 3.7	S		0.5-1
RazorLine Neon 300	S		0
PrimaLine 1.5 Wet			N/A
PrimaLine 1.5 XT Wet			N/A
PrimaLine 3 Wet			N/A
PrimaLine 3 XT Wet			N/A
PrimaLine 4.4 XT Gen 2 Wet			N/A
Radialux 2.2 RGB Wet			N/A
Radialux 4.4 RGB Wet			N/A
Radialux 4.4 RGBW Wet			N/A
Radialux 5.9 RGBW Wet			N/A

Chart Key

- Y** Tape, channel, and connector fit
- Y*** (Wet Tape Only) Tape light end caps do not fit
- S** (Dry Tape Only) Connector does not fit in channel / leads should be soldered
- Does not fit width and /or height

Hotspot Values

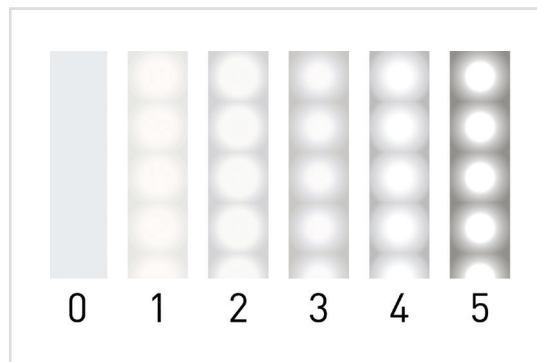

Compatibility Visual Key

